

# Model 16S


# 16 GPM

# Performance Curves

FLOW RANGE: 10 -20 GPM

OUTLET SIZE: 1 1/4 " NPT

NOMINAL DIA. 4"

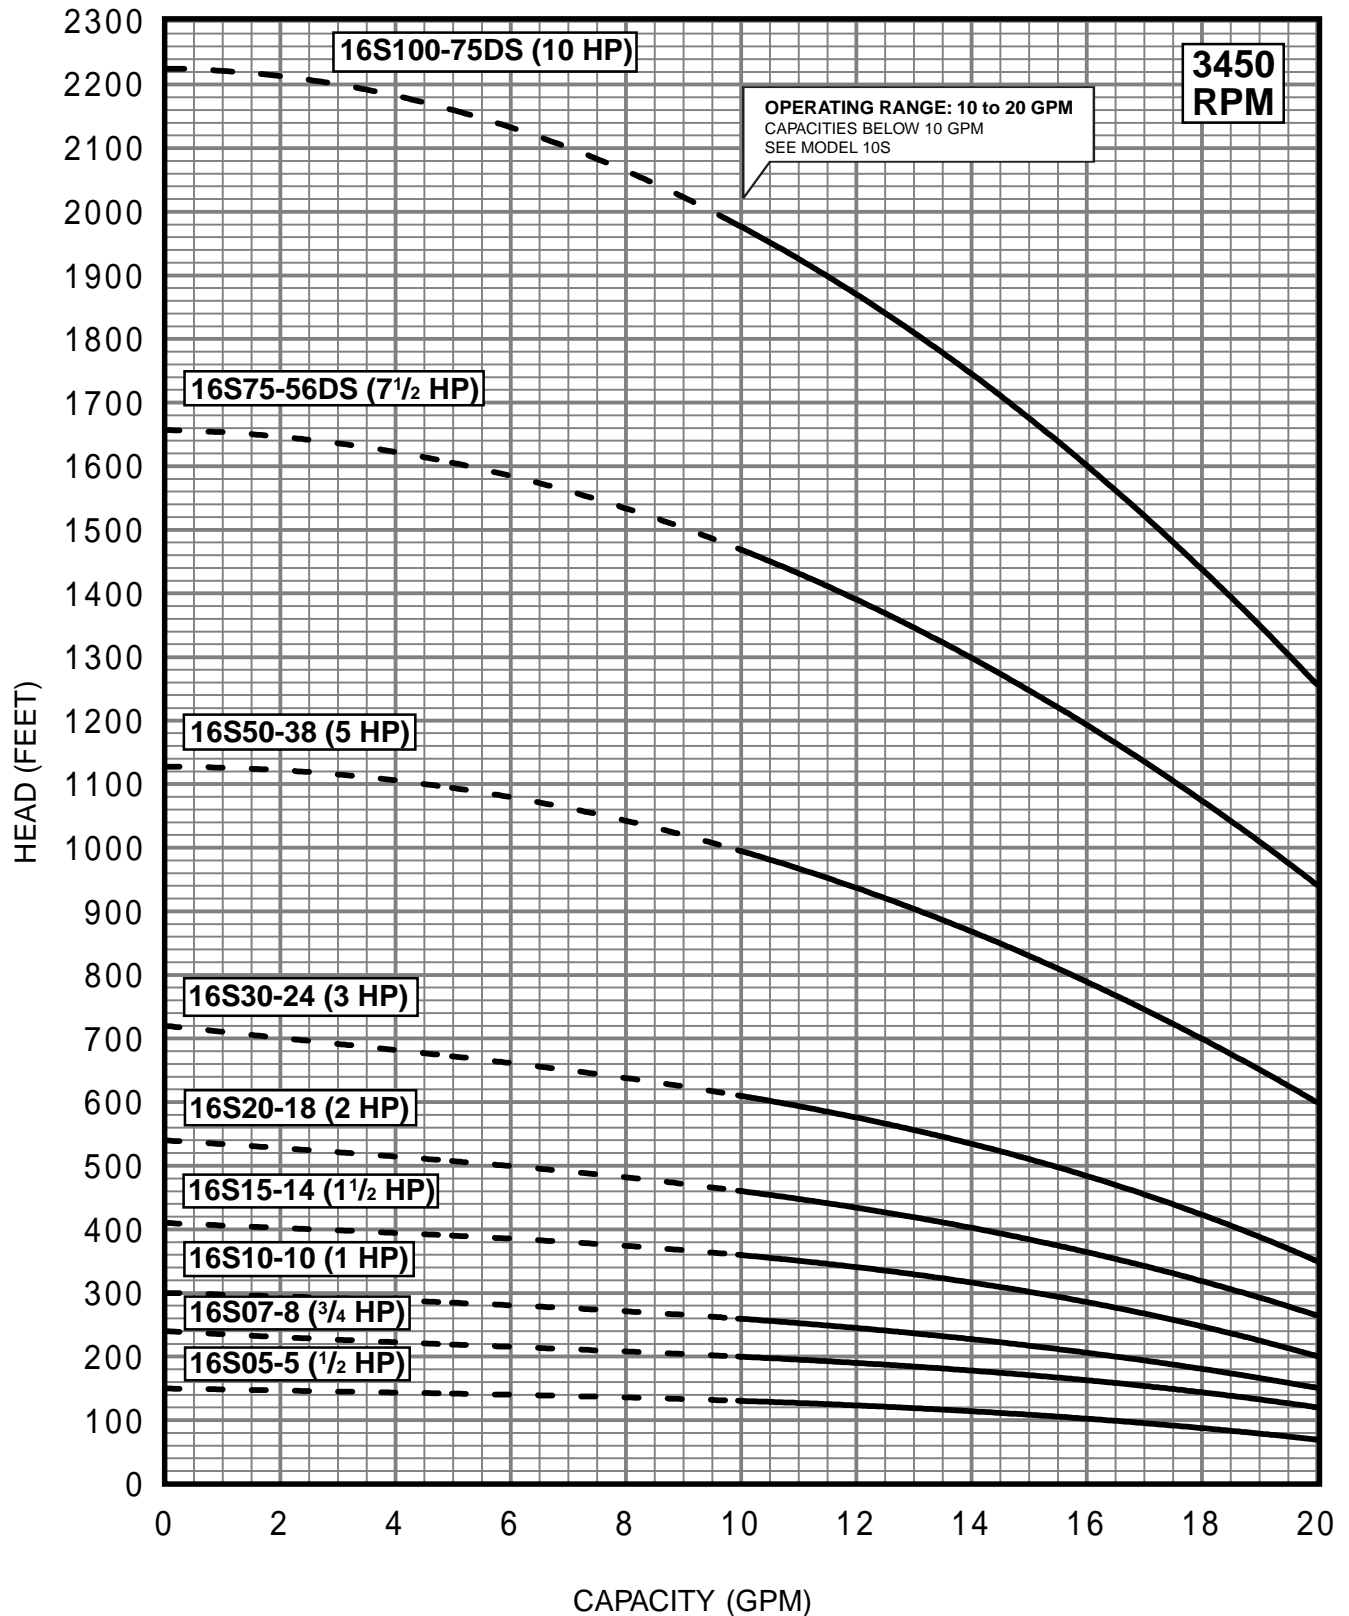

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.  
4" MOTOR STANDARD, .5-5 HP/3450 RPM.  
6" MOTOR STANDARD, 7.5-10HP/3450 RPM.

Performance conforms to ISO 2548 Annex B  
@ 2 ft. min. submergence.



# Model 25S


# 25 GPM

# Performance Curves

FLOW RANGE: 18 -32 GPM

OUTLET SIZE: 1 1/2 " NPT

NOMINAL DIA. 4"

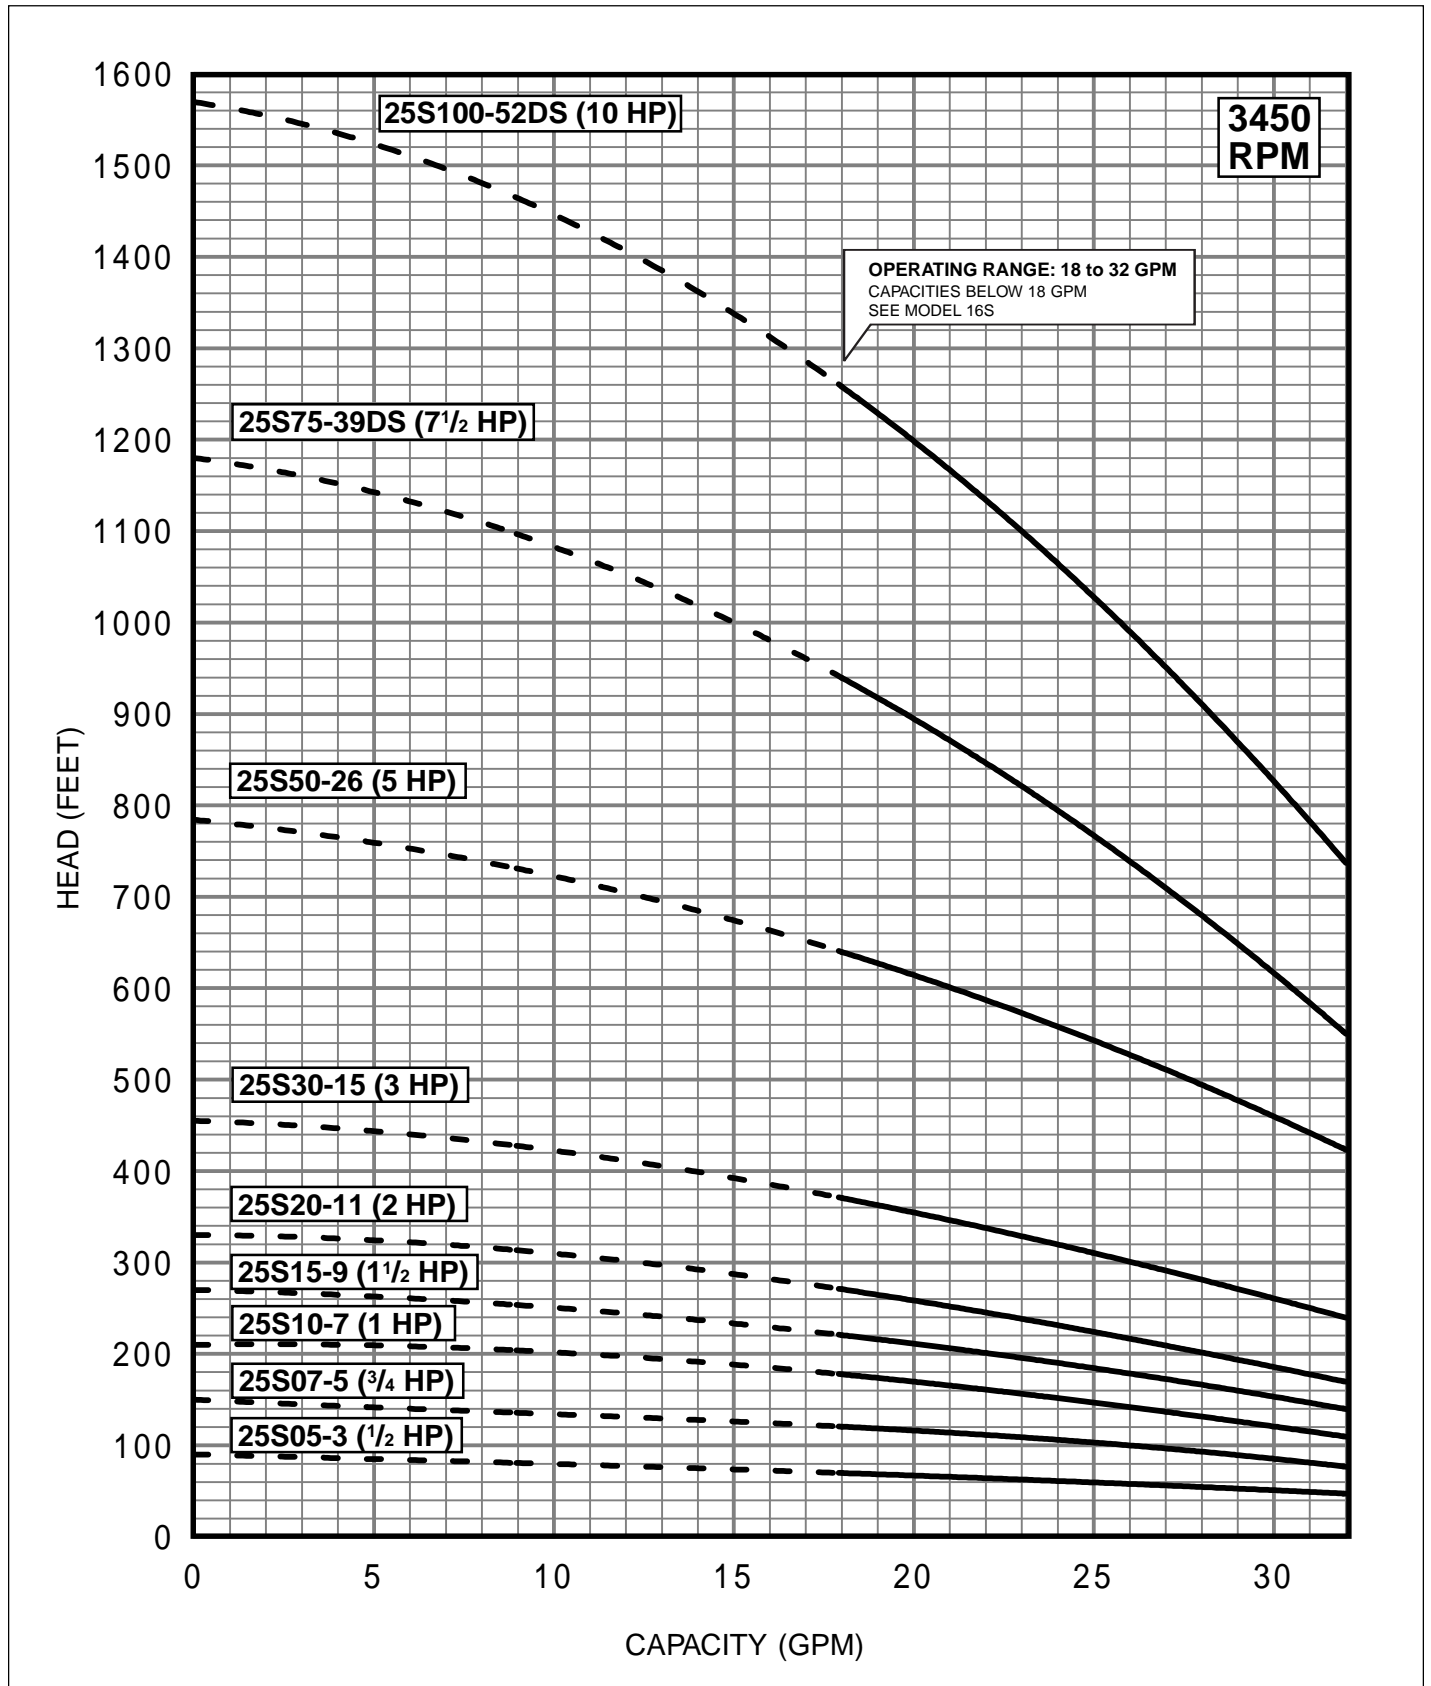

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.  
4" MOTOR STANDARD, .5-5 HP/3450 RPM.  
6" MOTOR STANDARD, 7.5-10HP/3450 RPM.

Performance conforms to ISO 2548 Annex B  
@ 2 ft. min. submergence.