


# Horizontal Multi-Stage Jet/Centrifugal Pumps

## Centrifugal Performance

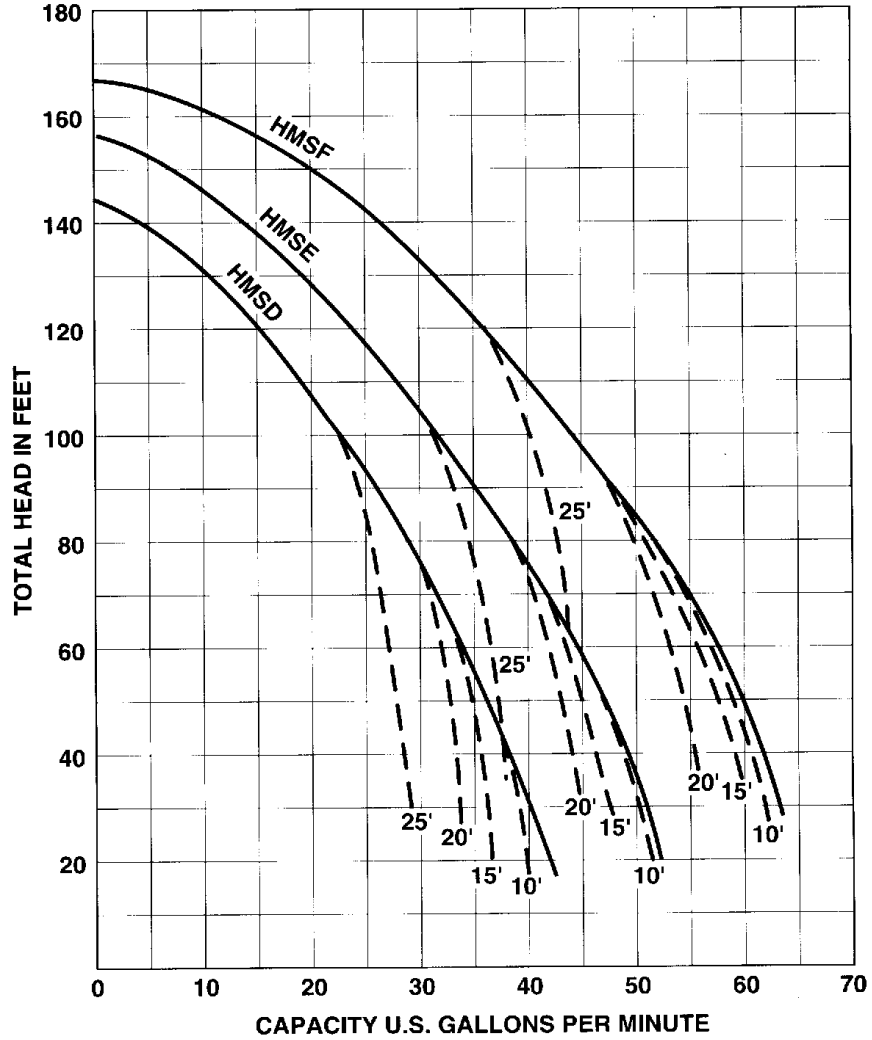

**NOTE:** Dotted lines indicate performance reduction at high suction lift.

**NOTE:** Pumps installed with a CON-AIRE<sup>®</sup> tank require a 100 PSI relief valve. Pumps installed with a conventional tank require a 75 PSI relief valve. Relief valve must be capable of relieving entire flow of pump at relief pressure.