


## CAMPBELL UV SYSTEMS

MODEL	FLOW RATE	# LAMPS	CONNECTIONS	VOLTAGE
DWS7	7 GPM	1	3/4" MNPT	115VAC
DWS15	15 GPM	1	3/4" MNPT	115VAC
DWS24	24 GPM	2	1.5" MNPT	115VAC

When used in conjunction with a sediment filter, these systems will automatically disinfect water in home or industry without chemicals or foul tastes & odors. Water flows into the unit between the quartz sleeve and the chamber wall, setting up a controlled turbulence that exposes micro-organisms in the water to lethal dosages of ultraviolet rays, making exiting water safe and ready to use.

*Figure 1. Cross sectional diagram of typical UV disinfection unit.*

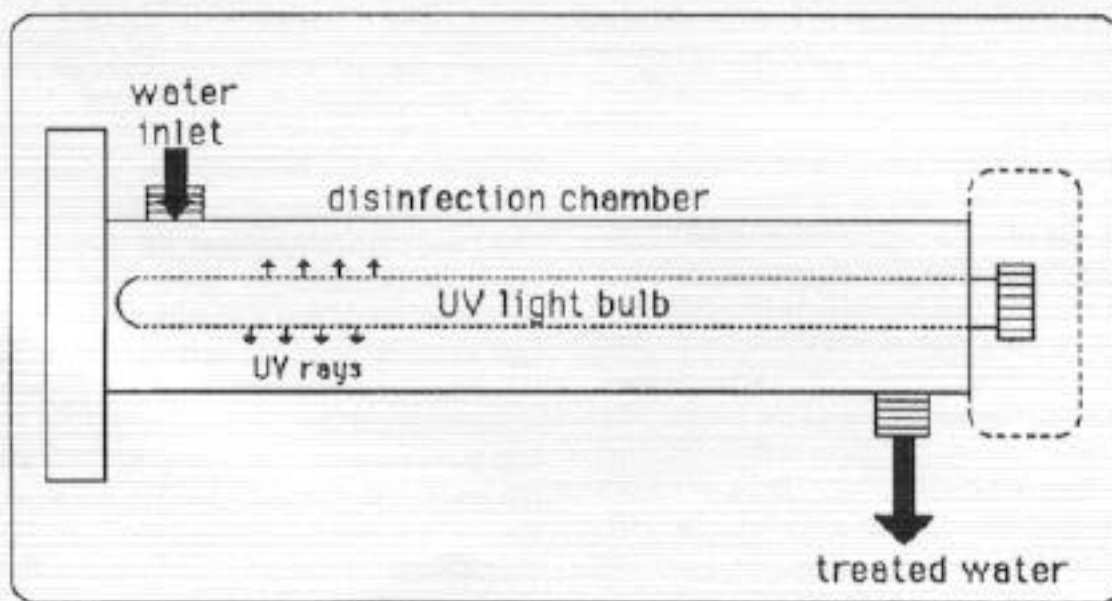

Compact and easy to install, they require little maintenance and offer low operating costs. The 304 stainless steel disinfection chamber is guaranteed for 5 years, and all other components (except UV lamp) are guaranteed for 1 year.

See our Stock Items Catalog for replacement parts.