


WPB-COM COMMERCIAL BOOSTERS

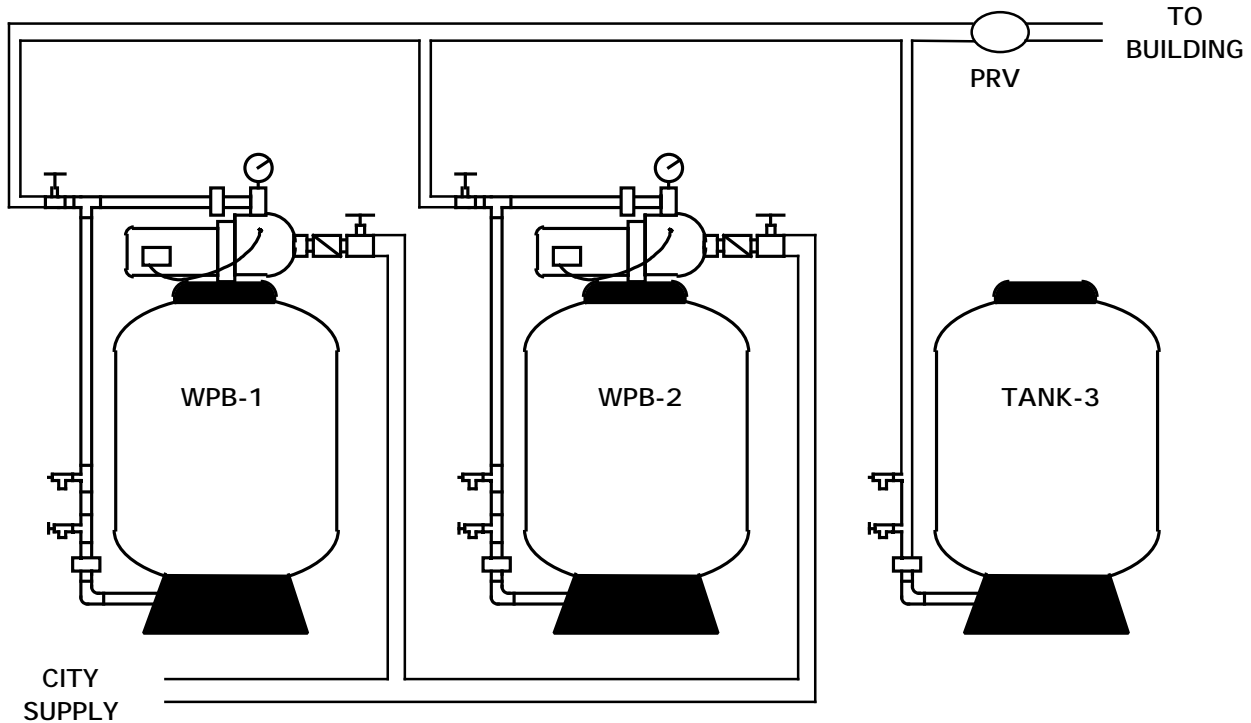

WPB-COM-1	50 GPM @ 45 PSI BOOST	1 HP, 115/230 VAC, 50 GAL TANK
WPB-COM-2	60 GPM @ 45 PSI BOOST	1 HP, 115/230 VAC, 85 GAL TANK
WPB-COM-3	80 GPM @ 45 PSI BOOST	1.5 HP, 115/230 VAC, 85 GAL TANK
TANK -3	50 - 119 GALLON DEPENDING UPON PRESSURE & FLOW	

Duplex WPB booster systems are ideal for small commercial applications that require flows to 80 GPM and operating pressures to 75 PSI. They allow an inexpensive and less complex alternative to packaged lead / lag systems, especially when single phase is the only power source available. The WPB systems are installed as shown above and, depending upon operating pressure, an additional tank may be included. Pumps are either 1 or 1.5 HP and tank sizes range from 50 to 119 gallons.

The boosters are completely preplumbed with copper piping, full port ball valves, pressure relief valves (for tank protection), drain cocks, and spring loaded check valves. Standard pressure switches are upgraded to low deadband units that allow a 2 -3 PSI lower cut in pressure for WPB-2. This allows the units to operate in true lead / lag fashion. An optional 24 hour Lead pump alternator is also available.



PACIFIC LIQUID & AIR SYSTEMS
PUMPS • MOTORS • CONTROLS

761 AHUA STREET
HONOLULU, HAWAII 96819
PH 536-7699 FAX 536-8761
www.pacificliquid.com

PL&A CAD
01/98